

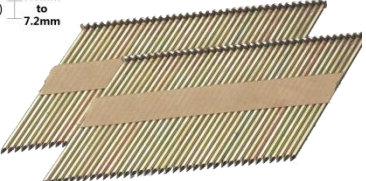


DATASHEET

Strip nailer SRN10034

SRN10034 Strip nailer							
	FEATURES <ul style="list-style-type: none"> * Comfortable rubber grip * Simple and strong body * Easy operation * Adjustable depth of drive * Single fire trigger included 						
	APPLICATIONS <ul style="list-style-type: none"> * Floor and wall framing * Window build-up * Wall sheathing * Subflooring * Roof laths * Fencing and exterior decks * Shuttering 						
SPECIFICATIONS							
Weight Dimensions Load capacity Maximum allowable pressure Recommended pressure range Actuation mode	3,90 kg 500 x 130 x 380mm 86~94 nails 8,3 bar 5~7 bar Contact actuation						
FASTENERS							
	34° D-head paper collated nails						
	<table border="1"> <tr> <td>Length</td> <td>50~100 mm</td> </tr> <tr> <td>Shank</td> <td>2,8~3,4 mm</td> </tr> <tr> <td>Head</td> <td>7,0~7,2 mm</td> </tr> </table>	Length	50~100 mm	Shank	2,8~3,4 mm	Head	7,0~7,2 mm
Length	50~100 mm						
Shank	2,8~3,4 mm						
Head	7,0~7,2 mm						