



NOBE ApS offers under the brand RGN a wide range of fastening tools.

Our aim is to offer good quality to the best value for your money.

We cooperate closely with experienced dealers to ensure that our customers get professional advice about optimum use and maintenance.

In this brochure you will find information about all our tools. Please do not hesitate to contact us for further details.











# **Table of contents**

Coll na	lilers neavy duty				
•	CN55	3			
•	CN57	4			
•	CN70	5			
•	CN80	6			
•	CN90	7			
•	CN90B	8			
•	CN100	9			
•	CN100EPAL	10			
Coil na	ilers construction				
•	CN45	11			
•	CN565B	12			
•	CN50G	13			
Roofing	g coil nailers				
•	CRN45A	14			
Framin	g nailers				
•	SRN9021	15			
•	SRN9034	16			
•	SRN10034	17			
•	SRN10034-2	18			
Stapler	rs ·				
•	N851	19			
•	N5021	20			
•	7116	21			
•	7116L	22			
•	8016	23			
•	8016L	24			
Finishir	ng nailers				
•	T64	25			
•	NT65	26			
Spare parts					
Fasten	Fasteners				
Contact information					



# **CN55 Coil nailer**



#### **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Pallets, drums and export wooden boxes
- \* Crating
- \* Wooden fence
- \* General construction applications

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

2.88 kg 335 x 130 x 295 mm 250~400 nails 5~7 bar

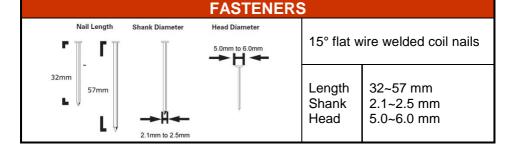



# **CN57 Coil nailer**



## **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Pallets, drums and export wooden boxes
- \* Crating
- \* Wooden fence
- \* General construction applications

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

2.50 kg 270 x 131 x 283 mm 300~350 nails 5~7 bar

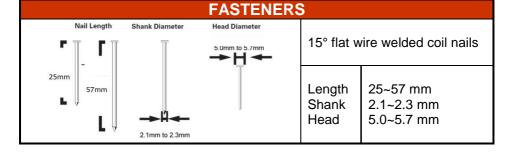



# **CN70 Coil nailer**



#### **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Pallets, drums and export wooden boxes
- \* Crating
- \* Wooden fence
- \* General construction applications

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

3.67 kg 315 x 128 x 306 mm 225~300 nails 5~7 bar

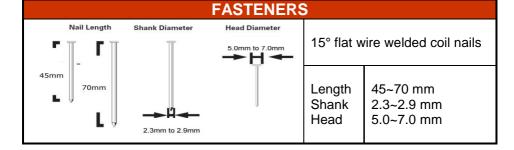



# **CN80** Coil nailer



#### **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Pallets, drums and export wooden boxes
- \* Crating
- \* Wooden fence
- \* General construction applications

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

3.98 kg 362 x 132 x 307 mm 225~300 nails 5~7 bar

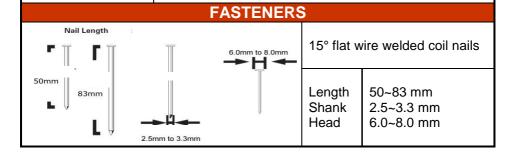



# **CN90 Coil nailer**



#### **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Pallets, drums and export wooden boxes
- \* Crating
- \* Wooden fence
- \* General construction applications

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

4.10 kg 362 x 132 x 307 mm 225~275 nails 5~7 bar

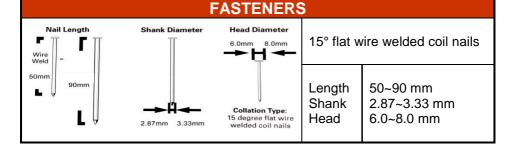



# **CN90B** Coil nailer



#### **FEATURES**

- \* New design → more power
- \* Depth control dial, nail depth is easily adjusted
- \* Adjustable firing mode, single fire or bump fire

## **APPLICATIONS**


- \* Floor and wall framing
- \* Roof and wall sheathing
- \* Fencing
- \* Pallets, drums and wooden boxes

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

3.9 kg 360 x 312 x 141 mm 200~300 nails 5~8.3 bar

## **FASTENERS**



15° flat wire welded coil nails

Length Shank Head

50~90 mm 2.5~3.8 mm 6.0~8.0 mm



# **CN100 Coil nailer**



#### **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Assembly and repair of heavy-duty pallets, drums and export wooden boxes
- \* Crating
- \* General construction applications
- \* Wall framing

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

5.35 kg 417 x 156 x 336 mm 150~300 nails 5~7 bar

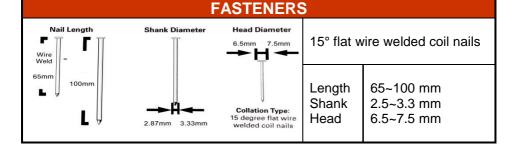



# **CN100EPAL** Industrial coil nailer



## **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Downwards direction exhaust
- \* Comfortable rubber grip

## **APPLICATIONS**

- \* Euro pallets
- \* Pallets
- \* Crating
- \* Drums

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Maximum allowable
pressure
Recommended press

Recommended pressure range

Actuation mode

5,60 kg

455 x 156 x 336mm


150 - 300 nails

8,3 bar

5~7 bar

Contact actuation

## **FASTENERS**



15° wire welded ring shank coil nails

Length Shank Head 70~90 mm

nank 3,5 mm ead 8,6 mm



# **CN45 Coil nailer**



#### **FEATURES**

- \* Light weight
- \* Drives both conical wire welded and plastic sheet collated nails without any adjustment
- \* Adjustable firing mode, single fire or bump fire
- \* Depth control dial, nail depth is easily adjusted
- \* Plastic carrying case included

## **APPLICATIONS**

- \* Sub-flooring
- \* Fencing
- \* Wall sheathing and roof sheathing
- \* Fastening gypsum board, decorative board and other interior boards

## **SPECIFICATIONS**

Weight Dimensions Load capacity

Operating pressure


1.60 kg

248 x 108 x 260 mm

400 nails (conical wire welded nails) 200 nails (plastic sheet collated nails)

5~7 bar

# **FASTENERS**



15° conical wire welded nails and flat plastic sheet collated nails

Length Shank Head 25~50 mm 1.59~2.1 mm 3.5~5.0 mm



# CN565B Coil nailer



#### **FEATURES**

- \* Light weight
- \* Drives both flat wire welded and plastic sheet collated nails without any adjustment
- \* Adjustable firing mode, single fire or bump fire
- \* Depth control dial, nail depth is easily adjusted
- \* Plastic carrying case included

# **APPLICATIONS**

- \* Siding (hardboard and cement)
- \* Sheathing, fencing and sub-flooring
- \* Roof decking
- \* Exterior deck and trim
- \* Furring and strapping

## **SPECIFICATIONS**


Weight Dimensions Load capacity 2.50 kg

320 x 130 x 273 mm

250~400 nails (flat wire welded nails) 200 nails (plastic sheet collated nails)

Operating pressure 5~7 bar

## **FASTENERS**



15° flat wire welded nails and flat plastic sheet collated nails

Length

45~65 mm (wire welded)

32~65 mm (plastic collated)
Shank 2.3~2.5 mm
Head 5.0~6.0 mm



# **CN50G Construction coil nailer**



## **FEATURES**

- \* Small size, light weight
- \* Depth control dial, nail depth is easily adjusted
- \* Adjustable firing mode, single fire or bump fire
- \* Straight drive system
- \* Plastic carrying case included

## **APPLICATIONS**

- \* Fastening gypsum board and other interior boards
- \* Metal connector for metal sheet roof

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

1.75 kg 299 x 133 x 260 mm 200 nails 5~7 bar

## **FASTENERS**



15° flat plastic sheet collated nails

Length 2 Shank 2 Head 5

25~50 mm 2.2~2.5 mm 5.3~7.15 mm



# **CRN45A Roofing coil nailer**



#### **FEATURES**

- \* Powerful
- \* Light weight

Adjustable firing mode, single fire or bump fire

- \* Depth control dial, nail depth is easily adjusted
- \* Plastic carrying case included


## **APPLICATIONS**

- \* Fastening asphalt and fiberglass shingles
- \* Siding installation
- \* Fastening lath wire on plywood
- \* Wooden box assembly
- \* Thin metal applications

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

2.58 kg 313 x 116 x 271 mm 120 nails 5~7 bar

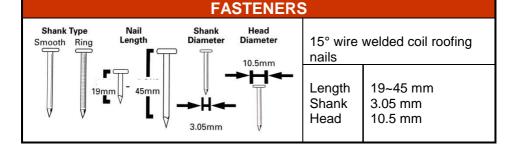



# **SRN9021 Framing nailer**



#### **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip

## **APPLICATIONS**

- \* Floor and wall framing
- \* Window build-up
- \* Wall sheathing
- \* Roofing

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

3.59 kg 554 x 108 x 340 mm 64~70 nails 5~8 bar

# Shank Type Smooth Screw Ring Nail Length Shank Diameter Head Diameter 5.8mm 7.2mm 50mm 83mm 2.87mm 3.33mm

21° plastic collated strip nails

Length 50~83 mm Shank 2.8~3.33 mm Head 5.8~7.2 mm



# **SRN9034 Framing nailer**



# **FEATURES**

- \* Powerful
- \* Big load capacity
- \* Comfortable rubber grip


## **APPLICATIONS**

- \* Floor and wall framing
- \* Window build-up
- \* Wall sheathing
- \* Roofing

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

3.82 kg 460 x 108 x 360 mm 86~94 nails 5~8 bar



34° paper tape collated strip nails

Length Shank Head

50~83 mm 2.8~3.33 mm 7.0~7.2 mm



# SRN10034 Strip nailer



## **FEATURES**

- \* Comfortable rubber grip
- \* Simple and strong body
- \* Easy operation
- \* Adjustable depth of drive

#### **APPLICATIONS**

- \* Floor and wall framing
- \* Window build-up
- \* Wall sheathing
- \* Subflooring
- \* Roof laths
- \* Fencing and exterior decks
- \* Shuttering

## **SPECIFICATIONS**

Weight **Dimensions** Load capacity Maximum allowable pressure Recommended

pressure range Actuation mode 3,90 kg

500 x 130 x 380mm


86~94 nails

8.3 bar

5~7 bar

Contact actuation

## **FASTENERS**



34° D-head paper collated nails

Length Shank Head

50~100 mm 2.8~3.4 mm 7,0~7,2 mm



# RED SRN10034-2 Strip nailer



## **FEATURES**

- \* Well balanced
- \* Light weight
- \* Comfortable rubber grip
- \* Open nose design for easy extraction of jammed nail
- \* Tool free depth of drive adjustment
- \* Plastic carrying case and air connector included

## **APPLICATIONS**

- \* Floor and wall framing
- \* Window build-up
- \* Wall sheathing
- \* Subflooring
- \* Roof laths
- \* Fencing and exterior decks
- \* Shuttering

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Maximum allowable
pressure
Recommended pressure

range Actuation mode 3,69 kg 475 x 366 x 163mm 80 nails 8,3 bar 4,8~7,5 bar

Contact actuation

# **FASTENERS**



34° D-head paper collated nails

Length Shank Head 50~100 mm 2,9~3,3 mm 7.0 mm



# N851 Air stapler



#### **FEATURES**

- \* Powerful
- \* Light weight
- \* Adjustable firing mode, single fire or bump fire
- \* Depth control dial, nail depth is easily adjusted
- \* Quick-release nosepiece for clearing jam

## **APPLICATIONS**


- \* Wall sheathing
- \* Sub-flooring
- \* Roofing decking
- \* Furniture frames
- \* Crate and box assembly and vinyl siding

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

2.35 kg 350 x 100 x 120 mm 160 staples 5~7 bar

## **FASTENERS**



16 Ga. medium crown staple

Length 25~51 mm Shank 1.6 x 1.4 mm Crown 11.1 mm



# N5021 16 Ga. wide crown stapler



# **FEATURES**

- \* Wide crown stable
- \* Quick-release nosepiece for clearing jam
- \* Aluminum magazine

## **APPLICATIONS**


- \* Wire lathing
- \* Insulation sheathing

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

2.42 kg 360 x 254 x 76 mm 150 staples 5~8.3 bar

## **FASTENERS**



16 Ga. wide crown staple

Length Shank Crown 16~50 mm 1.6 x 1.4 mm 23.8 mm



# 7116 stapler



## **FEATURES**

- \* Light weight
- \* Low noise

## **APPLICATIONS**

- \* Furniture
- \* Upholstery
- \* Picture frames
- \* Decoration
- \* Foil, cardboard, weather strips

# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure


1.0 kg

150 x 45 x 220 mm

190 staples

4~7 bar

# **FASTENERS**



Type 71 staples

Length Shank Crown 6~16 mm 0.75 x 0.6 mm

9 mm



# 7116L stapler – long nose



# **FEATURES**

- \* Light weight
- \* Low noise

## **APPLICATIONS**

- \* Furniture
- \* Upholstery
- \* Picture frames
- \* Decoration
- \* Foil, cardboard, weather strips


# **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

1.1 kg 190 x 45 x 220 mm 190 staples

4~7 bar

## **FASTENERS**



Type 71 staples

Length Shank Crown 6~16 mm 0.75 x 0.6 mm 9 mm



# 8016 stapler



## **FEATURES**

- \* Light weight
- \* Low noise

## **APPLICATIONS**

- \* Furniture
- \* Upholstery
- \* Picture frames
- \* Decoration
- \* Foil, cardboard, weather strips


## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

1.0 kg 150 x 45 x 220 mm 157 staples

4~7 bar

# **FASTENERS**



Type 80 staples

Length Shank Crown 6~16 mm 0.91 x 0.7 mm 13 mm



# 8016L stapler - long nose



# **FEATURES**

- \* Light weight
- \* Low noise

## **APPLICATIONS**

- \* Furniture
- \* Upholstery
- \* Picture frames
- \* Decoration
- \* Foil, cardboard, weather strips

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

1.1 kg 190 x 45 x 220 mm 157 staples

## **FASTENERS**



4~7 bar

Type 80 staples

Length Shank Crown 6~16 mm 0.91 x 0.7 mm 13 mm



# T64 Straight finish nailer



#### **FEATURES**

- \* Quick-release nosepiece for easy jam clearing
- \* Aluminum magazine
- \* Plastic carrying case included

## **APPLICATIONS**

- \* Trimming
- \* Furniture
- \* Panel assembly

## **SPECIFICATIONS**


Weight
Dimensions
Load capacity
Operating pressure

2.0 kg 372 x 76 x 254 mm 150 nails 5~8.3 bar (70~120 psi)

# **FASTENERS**



16 Ga. straight finish nails



16 Ga. finish nails

Length Shank Head 25~65 mm 1.6~1.4 mm 2.8~1.3 mm



# NT65 Finishing nailer



#### **FEATURES**

- \* Light weight
- \* Adjustable firing mode, single fire or bump fire
- \* Depth control dial, nail depth is easily adjusted
- \* Adjustable exhaustor direction
- \* Low noise
- \* Quick-release nosepiece for easy jam clearing
- \* Plastic carrying case included

# **APPLICATIONS**


- \* Light framing
- \* Decoration
- \* Furniture frame assembly
- \* Cabinet work
- \* Door and window construction

## **SPECIFICATIONS**

Weight
Dimensions
Load capacity
Operating pressure

2.04 kg 344 x 82 x 304 mm 100 nails 5~7 bar (70~120 psi)

## **FASTENERS**



15 Ga. 34° angled finish nails

Length Shank Head

32~65 mm 1.8 mm

3.0 mm



# **Spare parts**

If you need to repair your RGN tool, we have spare parts for all models. Our parts also fit many other brands.

On <u>www.rgneurope.com</u> you will find part lists and drawings of all tools, so that you easily can see what part numbers are necessary for the repair.

You are welcome to contact us, if you need advice and guidance regarding the repair.





# **Fasteners**

We have the possibility to supply fasteners that fit our tools. Please ask for an offer.





Notes			



# **Contact information**

NOBE ApS Bjødstrupvej 10 DK-8410 Rønde Denmark

Tel: +45 8615 1913 E-mail: info@nobe.dk

www.rgneurope.com / www.nobe.dk











JΙ